

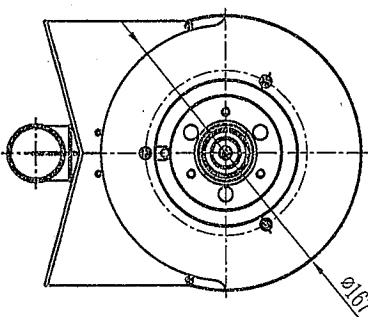
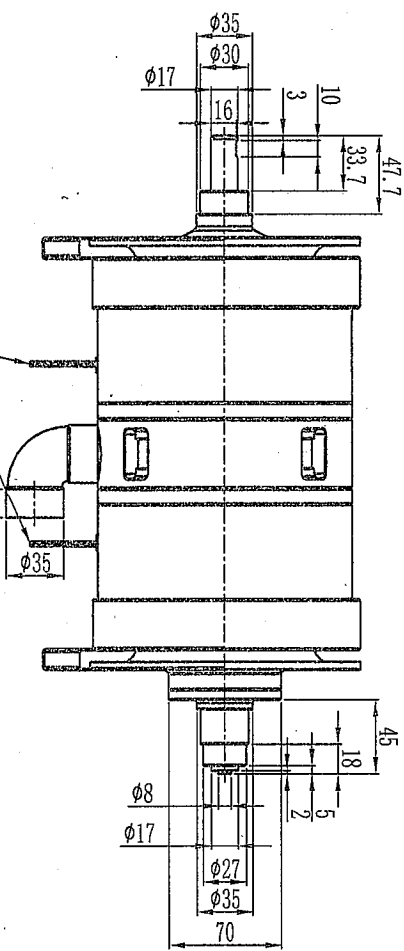
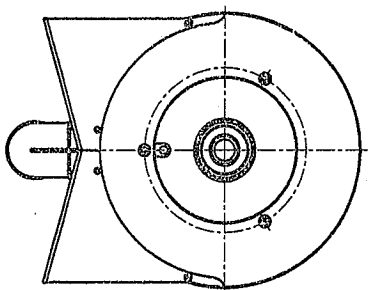
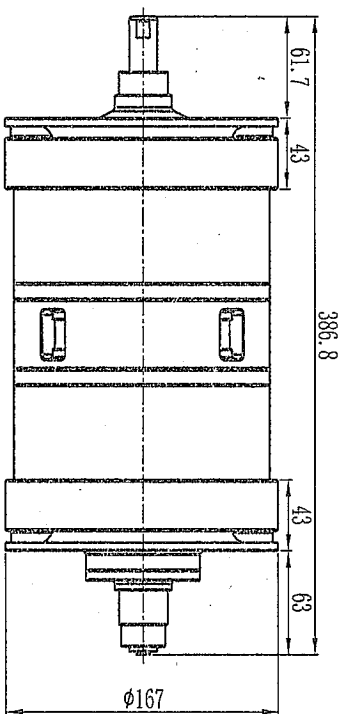


Model	P/N	Minimum torque at rated current (Kg.cm)	Rated current (mA)	Voltage (VDC)	Resistance $\pm 10\%$ @25°C (ohms)	Kinetic power ratings (W)			External Inertia (kg·cm <sup>2</sup> )	Max speed (rpm)	Weight (kg)	
						With Blower	Without Blower	5 min Continuous				
BHB-104A	A. 06. 04. 002	100	1500	24	16	4200	4000	1800	280	2.62*10 <sup>4</sup>	15000	22.92



各两根28AWG 引出线, 长450mm



比例1:2

Type	BHB-104A	Name	Blower Hysteresis Brakes	
Designer	2019.01.07	Scale	-	
Verifier	2019.1.1	Unit	mm	
Approver		Version	A0	

**Valid Magnetics Ltd**

The third angle

