
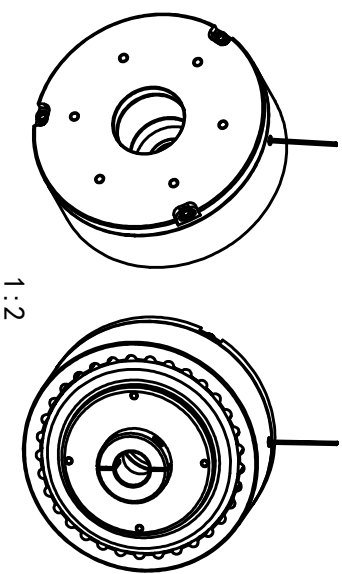


Model	P/N	Minimum torque at rated current (kg.cm)	Rated current (mA)	Voltage (VDC)	Resistance $\pm 10\% @ 25^\circ\text{C}$ (ohms)	Kinetic power ratings(W)		External Inertia (Kg.cm ²)	Weight (kg)
LB-303-42D	A.04.06.006	30	1200	24	20	5 Minutes	Continuous	2500	5.2

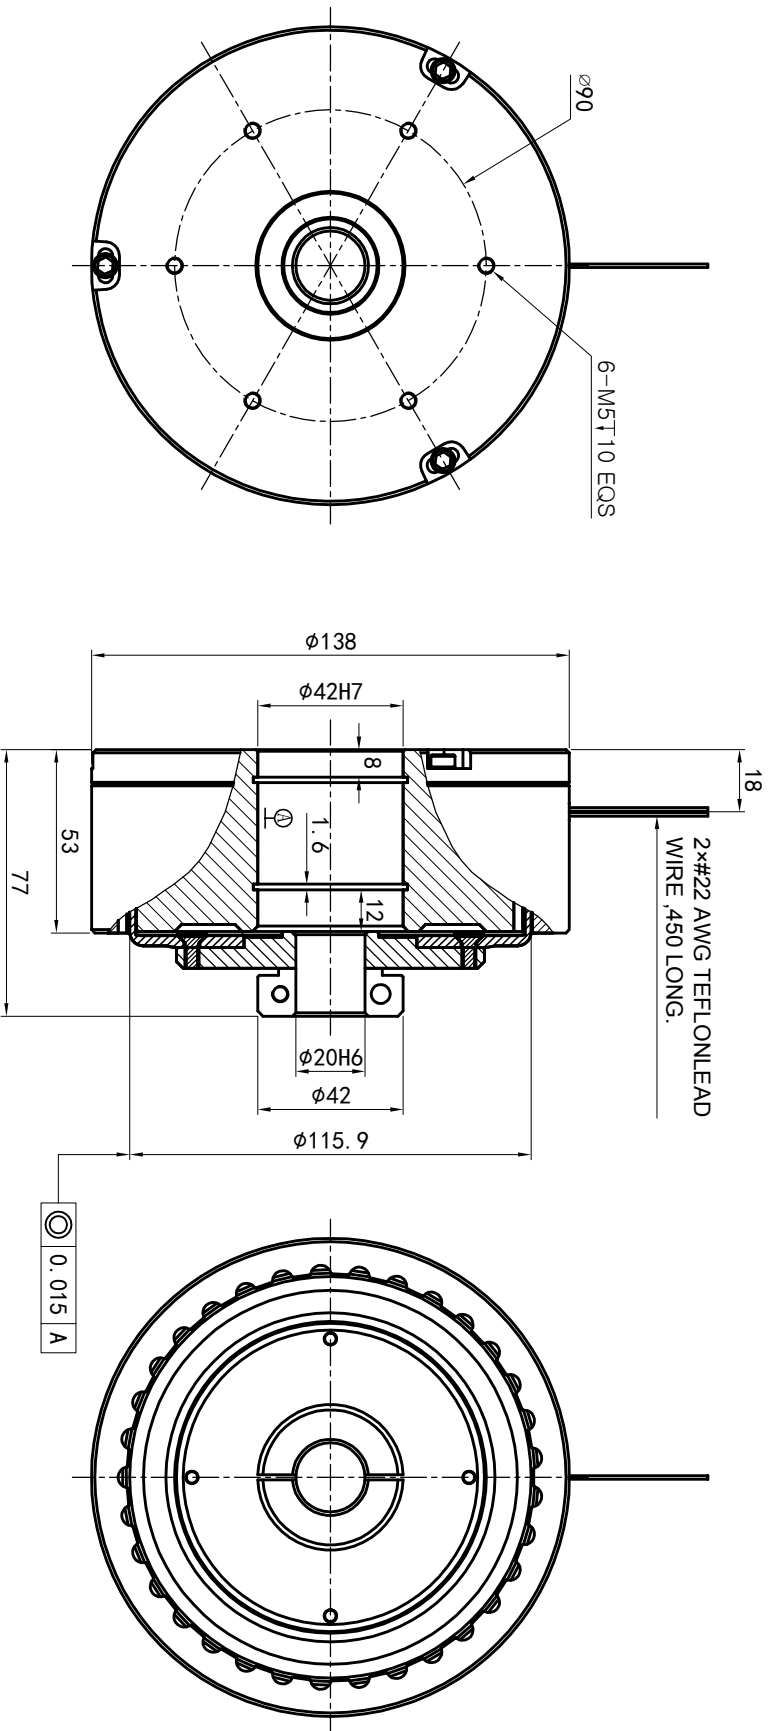

Note: Mounting screw 6-M5 maximum allowable depth 10mm.

Type	LB-303-42D	Name	Hollow Shaft Hysteresis Brake		
Designer		Scale	1:1	Unit	mm
Verifier		Version	A1		
Approver					

The third angle